

HOSE REELS: 505 SERIES

65 Maximum hose capacity



Hose Reels



Roller arm in tank/wall mount position



505 Series HD Double Pedestal Arm Hose Reel

Full metal heavy-duty double pedestal hose reels, with hose capacity up to 65' x 1/2" or 50' x 3/4" hose

Very tough construction

Able to stand regular use and abuse in intensive duty applications

Fatigue resistant steel spring

For years of durable performance and even load when pulling and recoiling the hose

Fully ported shaft and swivel

For better flow

Spool mounted on two permanently lubricated and sealed ball bearings

To reduce torque load on spring for smooth retraction and longer life

Large effective radial latching area

For easier operation

Hose guide arm

Can be placed in different positions to accommodate most any method of mounting

Hose reels offer four mounting positions

May be mounted in floor, wall, ceiling and tank positions


Hose reels are delivered in the ceiling mount position

MARKETS SERVED

- Car and truck dealers
- Service shops
- Fleets
- General manufacturing
- Service stations
- Lube trucks
- Mining and construction
- Railroad and mass transit

FLUIDS HANDLED

- Air
- Water
- Antifreeze solutions
- Synthetic and mineral oils
- DEF
- Waste oil evacuation
- Diesel
- Grease

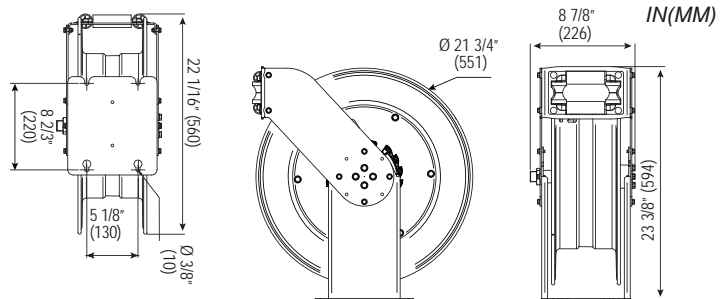

TECHNICAL SPECIFICATIONS

Operating Temperature Range

Air / Water / Antifreeze	-20°F to 140° F (-20°C to 60°C)
Oil	-22°F to 194°F (-30 °C to 90°C)
Grease	-22°F to 194°F (-30 °C to 90°C)
DEF	-4°F to 140°F (-20°C to 60°C)

Wetted Parts

Air / Water / Antifreeze	Steel , electro-less nickel plated steel, Nitrile rubber
Oil	Steel, electro-less nickel plated steel, Nitrile rubber
Grease	Steel, electro-less nickel plated steel, Polyurethane
DEF	Stainless steel, acetal, Viton

Weight *without hose*

65 lb (29.5 Kg)

Manual

850 825

Hose Reels

ORDER INFORMATION

Part No.	Hose Length	Hose I.D.	Outlet thread	Max. Working Pressure	Net weight	Reel only with swivel Part No.
LOW PRESSURE AIR/WATER antifreeze and windshield wash solutions - brass shaft and acetal swivel - inlet 3/4" NPT(F)						
505 120	65'	1/2"	1/2" NPT(M)	300 psi	79.3 lb	505 002
505 121	50'	3/4"	3/4" NPT(M)	300 psi	83.2 lb	505 002
LOW PRESSURE DEF stainless steel shaft and acetal swivel - inlet 3/4" NPT(F)						
505 550	50'	3/4"	3/4" BSPP(M)	300 psi	85 lb	505 502
LOW PRESSURE DIESEL steel shaft and swivel - inlet 3/4" NPT(F)						
505 425	50'	3/4"	3/4" NPT(M)	200 psi	83.7 lb	505 002
MEDIUM PRESSURE OILS steel shaft and swivel - inlet 3/4" NPT(F)						
505 220	65'	1/2"	1/2" NPT(M)	2,000 psi	80.3 lb	505 002
505 221*	50'	3/4"	3/4" NPT(M)	1,250 psi	84.7 lb	505 002
HIGH PRESSURE GREASE steel shaft and swivel - inlet 3/4" NPT(F)						
505 330	65'	3/8"	1/4" NPT(M)	4,000 psi	86 lb	505 014

*Hose reel 505 221 can also be used for waste oil evacuation

Recommended Accessories for use with 505 series reels



528 002	Bi-conical hose stop and U-bolt kit fits 1/2" hose
528 004	Bi-conical hose stop and U-bolt kit fits 3/8" hose
528 003	Bi-conical hose stop and U-bolt kit fits 3/4" hose